


# CEMA Safety Labels Placement Guidelines

Product: Unit Handling Equipment

Equipment: Motor Driven Live Roller Conveyors (UH-8)

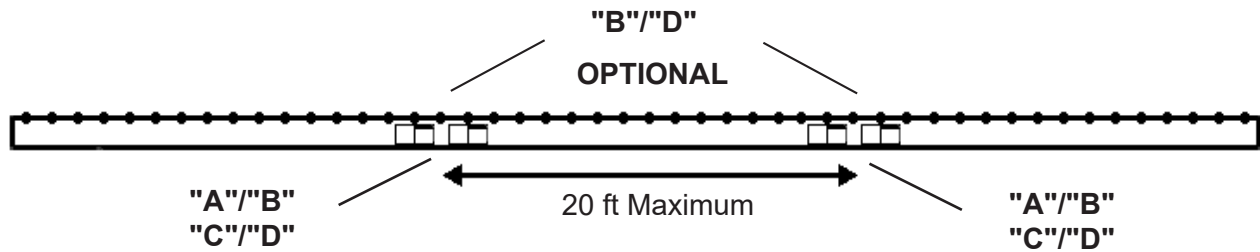

**Note:** Due to the design of these conveyors, there may not be room on the side rails to place the larger labels. In that case, the smaller labels may be used. Optionally, they may also be placed on the top surface of both rails. The key is the space available and visibility by operators and maintainers



“A”

(SPACE UP TO A MAXIMUM OF 20 ft CENTERS (BOTH SIDES))

To be placed along both sides of these conveyors since these conveyors provide surfaces and profiles attractive, but hazardous, for climbing, sitting, walking, or riding.



“B”

(SPACE UP TO A MAXIMUM OF 20 ft CENTERS (Sides or top surface of both rails))

Optional Label to be placed either on the side or top of rails when space available does not permit application of the larger label



“C”

(SPACE UP TO A MAXIMUM OF 20 ft CENTERS (BOTH SIDES))

To be placed along the sides of these conveyors to warn personnel that the conveyor can start automatically



“D”

(SPACE UP TO A MAXIMUM OF 20 ft CENTERS (Sides or top surface of both rails))

Optional Label to be placed either on the side or top of rails when space available does not permit application of the larger label.